



Mueller Streamline Co. Headquarters

150 Schilling Blvd
Suite 201
Collierville, Tennessee 38017
United States
Phone: 901 753 3200


Mueller Streamline Co. International

525 Okeechobee Blvd
Suite 860
West Palm Beach, FL 33401
United States
Phone: 561 273 8300

CYCLEMASTER® BALL VALVES - 3-WAY

Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- Full port construction to match line size ID
- Internally equalized ball design
- Rupture-proof encapsulated stem
- MCM Seal Technology
- UL/cUL Listed, Conforms to Pressure Equipment Directive 2014/68/EU, CRN 0C1241.9C

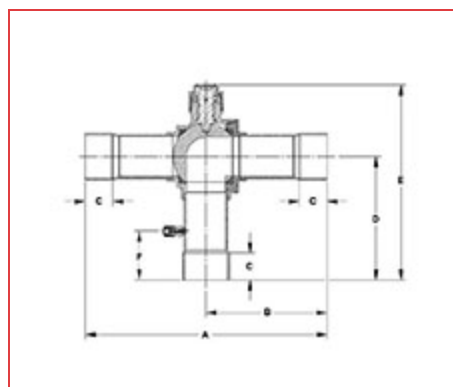

1

Item #	Connection Size	Port	MAP	Weight
<u>AU17860</u>	3/8 in	0.50 in	48 bar 700 psi	0.33 kg 0.73 lb

Item #	Connection Size	Port	MAP	Weight
<u>AU17861</u>	1/2 in	0.50 in	48 bar 700 psi	0.33 kg 0.74 lb
<u>AU17862</u>	5/8 in	0.50 in	48 bar 700 psi	0.34 kg 0.74 lb
<u>AU17863</u>	3/4 in	0.75 in	48 bar 700 psi	0.64 kg 1.40 lb
<u>AU17864</u>	7/8 in	0.75 in	48 bar 700 psi	0.69 kg 1.52 lb
<u>AU17865</u>	1 1/8 in	1.00 in	48 bar 700 psi	1.28 kg 2.82 lb
<u>A 17545</u>	1 3/8 in	1.25 in	48 bar 700 psi	2.25 kg 4.97 lb
<u>A 17546</u>	1 5/8 in	1.50 in	48 bar 700 psi	3.25 kg 7.17 lb
<u>AU17868</u>	2 1/8 in	1.93 in	48 bar 700 psi	3.75 kg 8.27 lb
<u>AU17871</u>	2 5/8 in	1.93 in	48 bar 700 psi	3.99 kg 8.80 lb