

MODEL NUMBER
ZP25KME-PFZ


SPECIFICATIONS	
ES NO.	DESCRIPTION
ES92-155	CONVERSION-METRIC

NOTES:



1. ALL DIMENSIONS IN MILLIMETERS
AND DEGREES. [DIMENSIONS IN INCHES].
-
2. ALL TOLERANCES ± 1.5 [0.06]
UNLESS OTHERWISE SPECIFIED.
DUE TO ACCUMULATED ASSEMBLY TOLERANCES
THE LISTED COMPONENTS MAY VARY FROM
THE MOUNTING HOLES AS TABULATED.
- | | |
|-------------------|------------------|
| SUCTION FITTING | ± 3.0 [0.12] |
| DISCHARGE FITTING | ± 3.0 [0.12] |

3. MOUNTING KIT:


GROMMET DUROMETER	3 FOOT KIT
30-35	527-0215-01

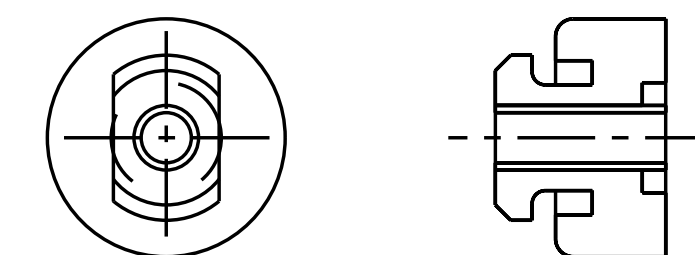

4. TUBE ENDS MUST BE PLUGGED.

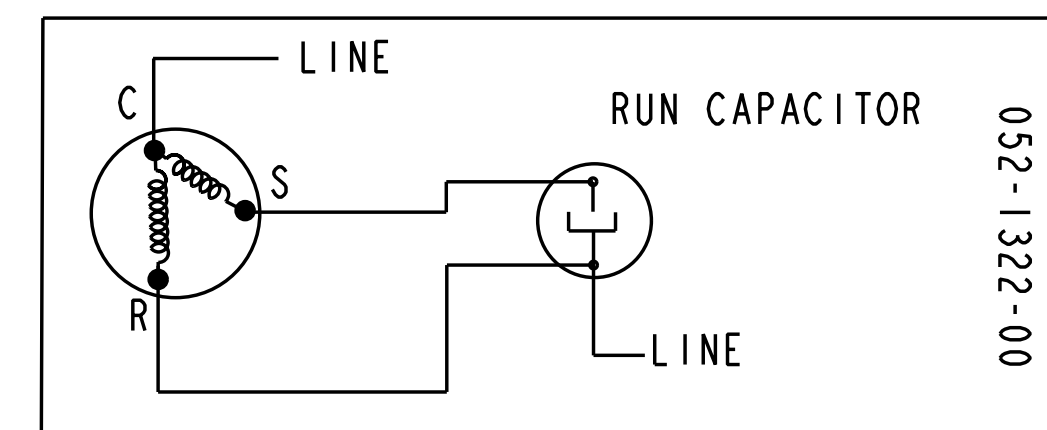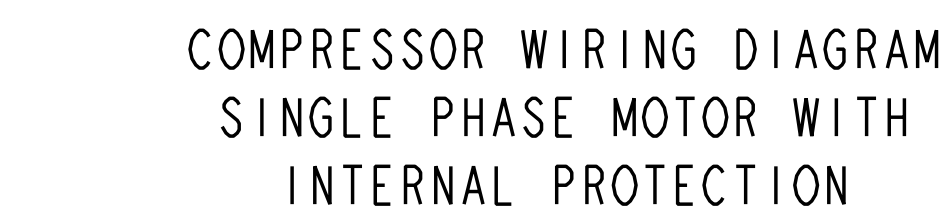

COMPRESSOR WIRING DIAGRAM THREE PHASE MOTOR WITH INTERNAL PROTECTION

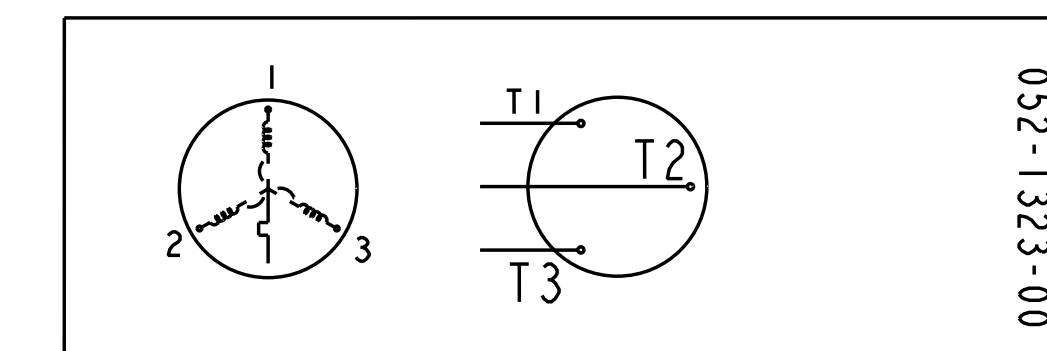


OBSOLETE

ECN100680	2	OBSOLETE	04-28-16	AZ	ZH	JOY
ECN006509	1	UPDATED MODEL NAME ; WAS: ZP25KBE-PFZ	08-09-13	SL	WH	FZ
ECN006509	0	RELEASED	02-19-13	EL	AH	FZ
ENG NOTICE NO.	REV. NO.	REVISIONS	DATE	BY	CHKD	APPR



2	4	CONFIDENTIALITY NOTICE THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMERSON CLIMATE TECHNOLOGIES, INC. AND SHALL BE RETURNED UPON DEMAND. IT SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, DISCLOSED TO ANYONE ELSE OR USED WITHOUT THE WRITTEN CONSENT OF EMERSON CLIMATE TECHNOLOGIES, INC.
---	---	--

MATERIAL SPECIFICATION		DRAWN BY EL	SUPERSEDES DWG. NO. / REV. NO. 497-1249-00 / 01	
N/A		DATE 02-19-13	SCALE 5:8	DATE FORMAT: MM-DD-YY
TITLE REF DWG-WELD COMP ASSM			DRAWING NUMBER 497-1471-00	SHEET 1 OF 1 DWG 4 SIZE



UNCONTROLLED - DO NOT MODIFY

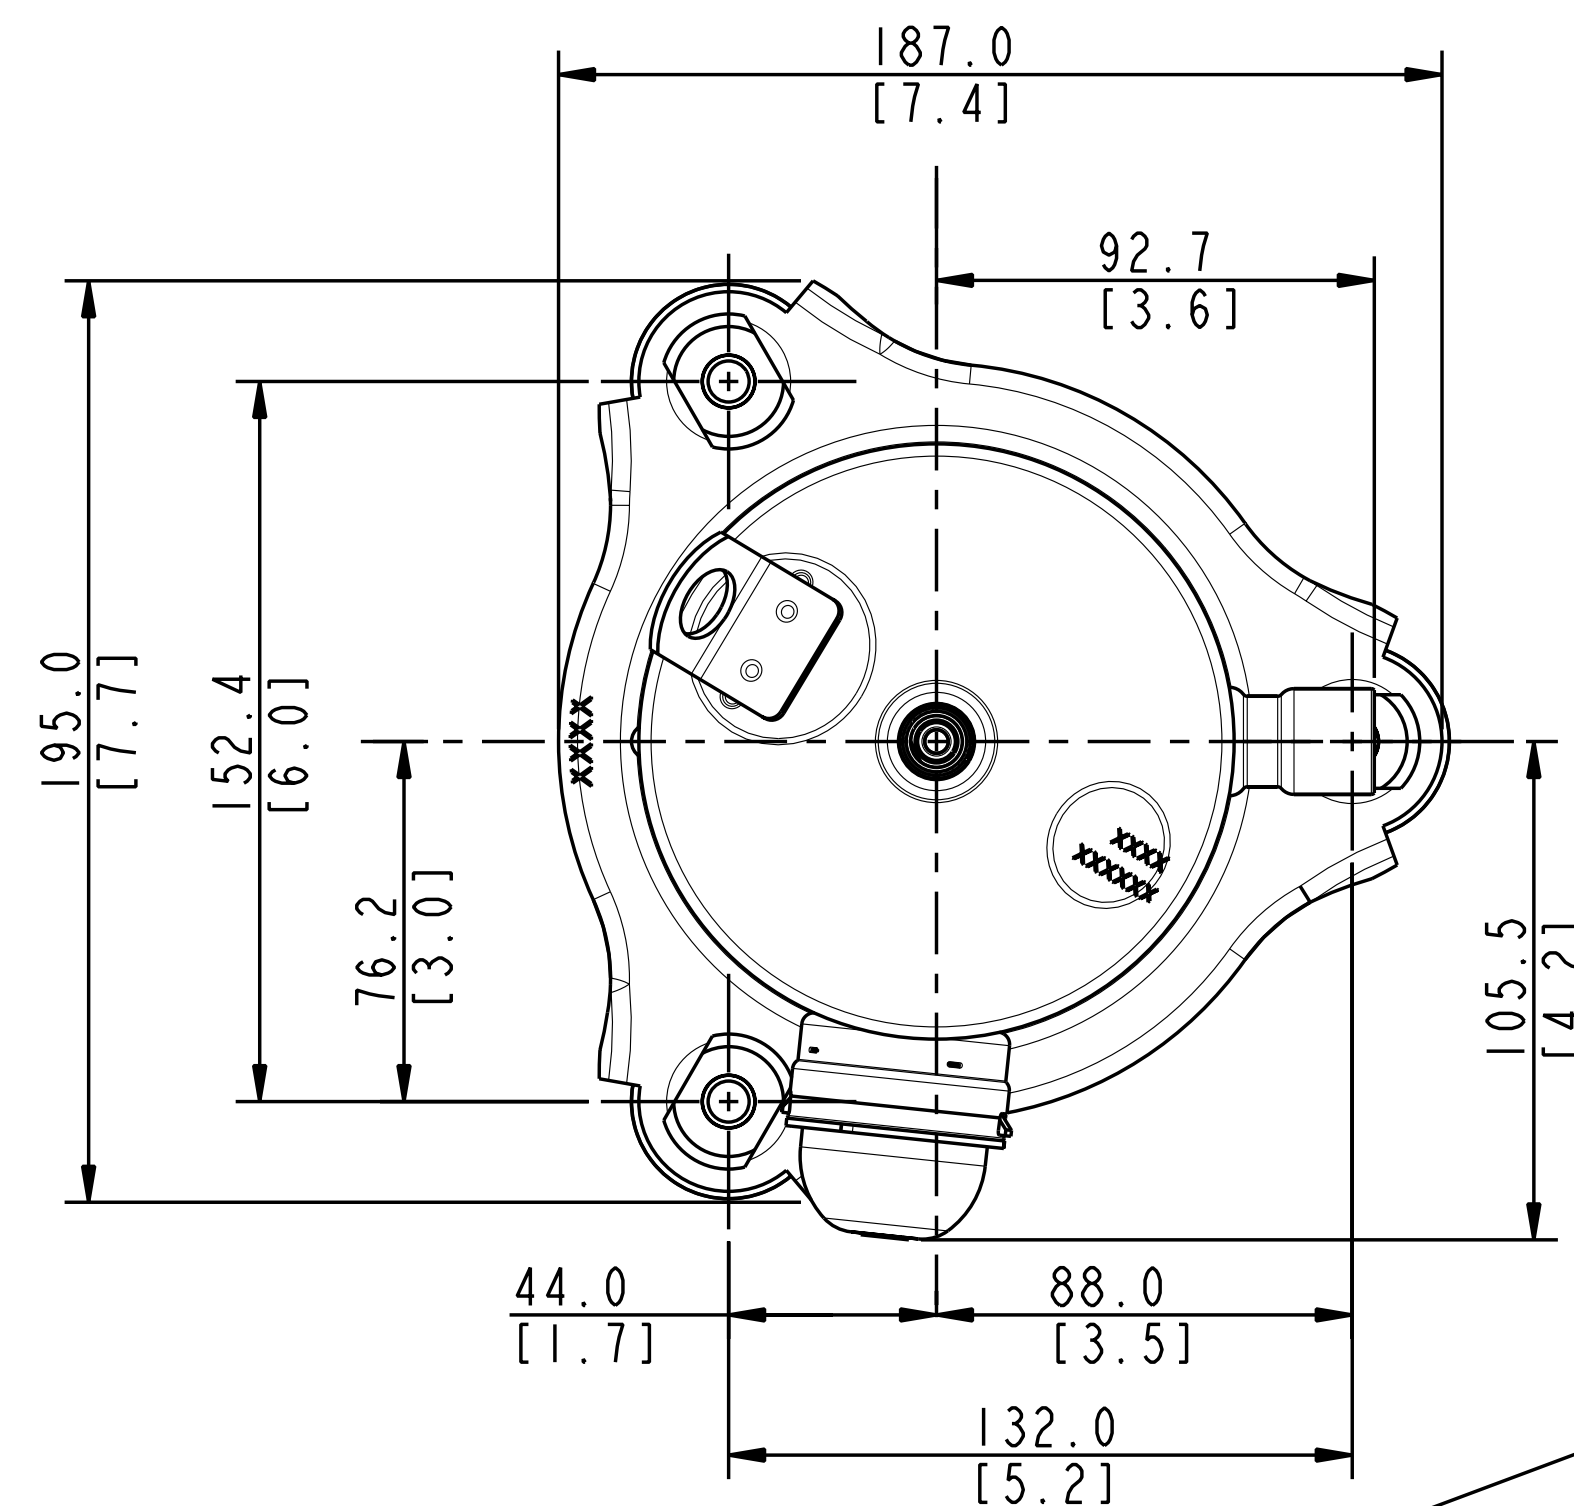

Ø 12.78-12.90 [0.503-0.508] I.D.
 ▽ 10.00 [0.394] MIN, 0.038
 [0.0015] MIN THICK EXTERIOR
 AND 0.038 [0.0015] MIN THICK
 INTERIOR COPPER PLATED STEEL
 DISCHARGE FITTING.

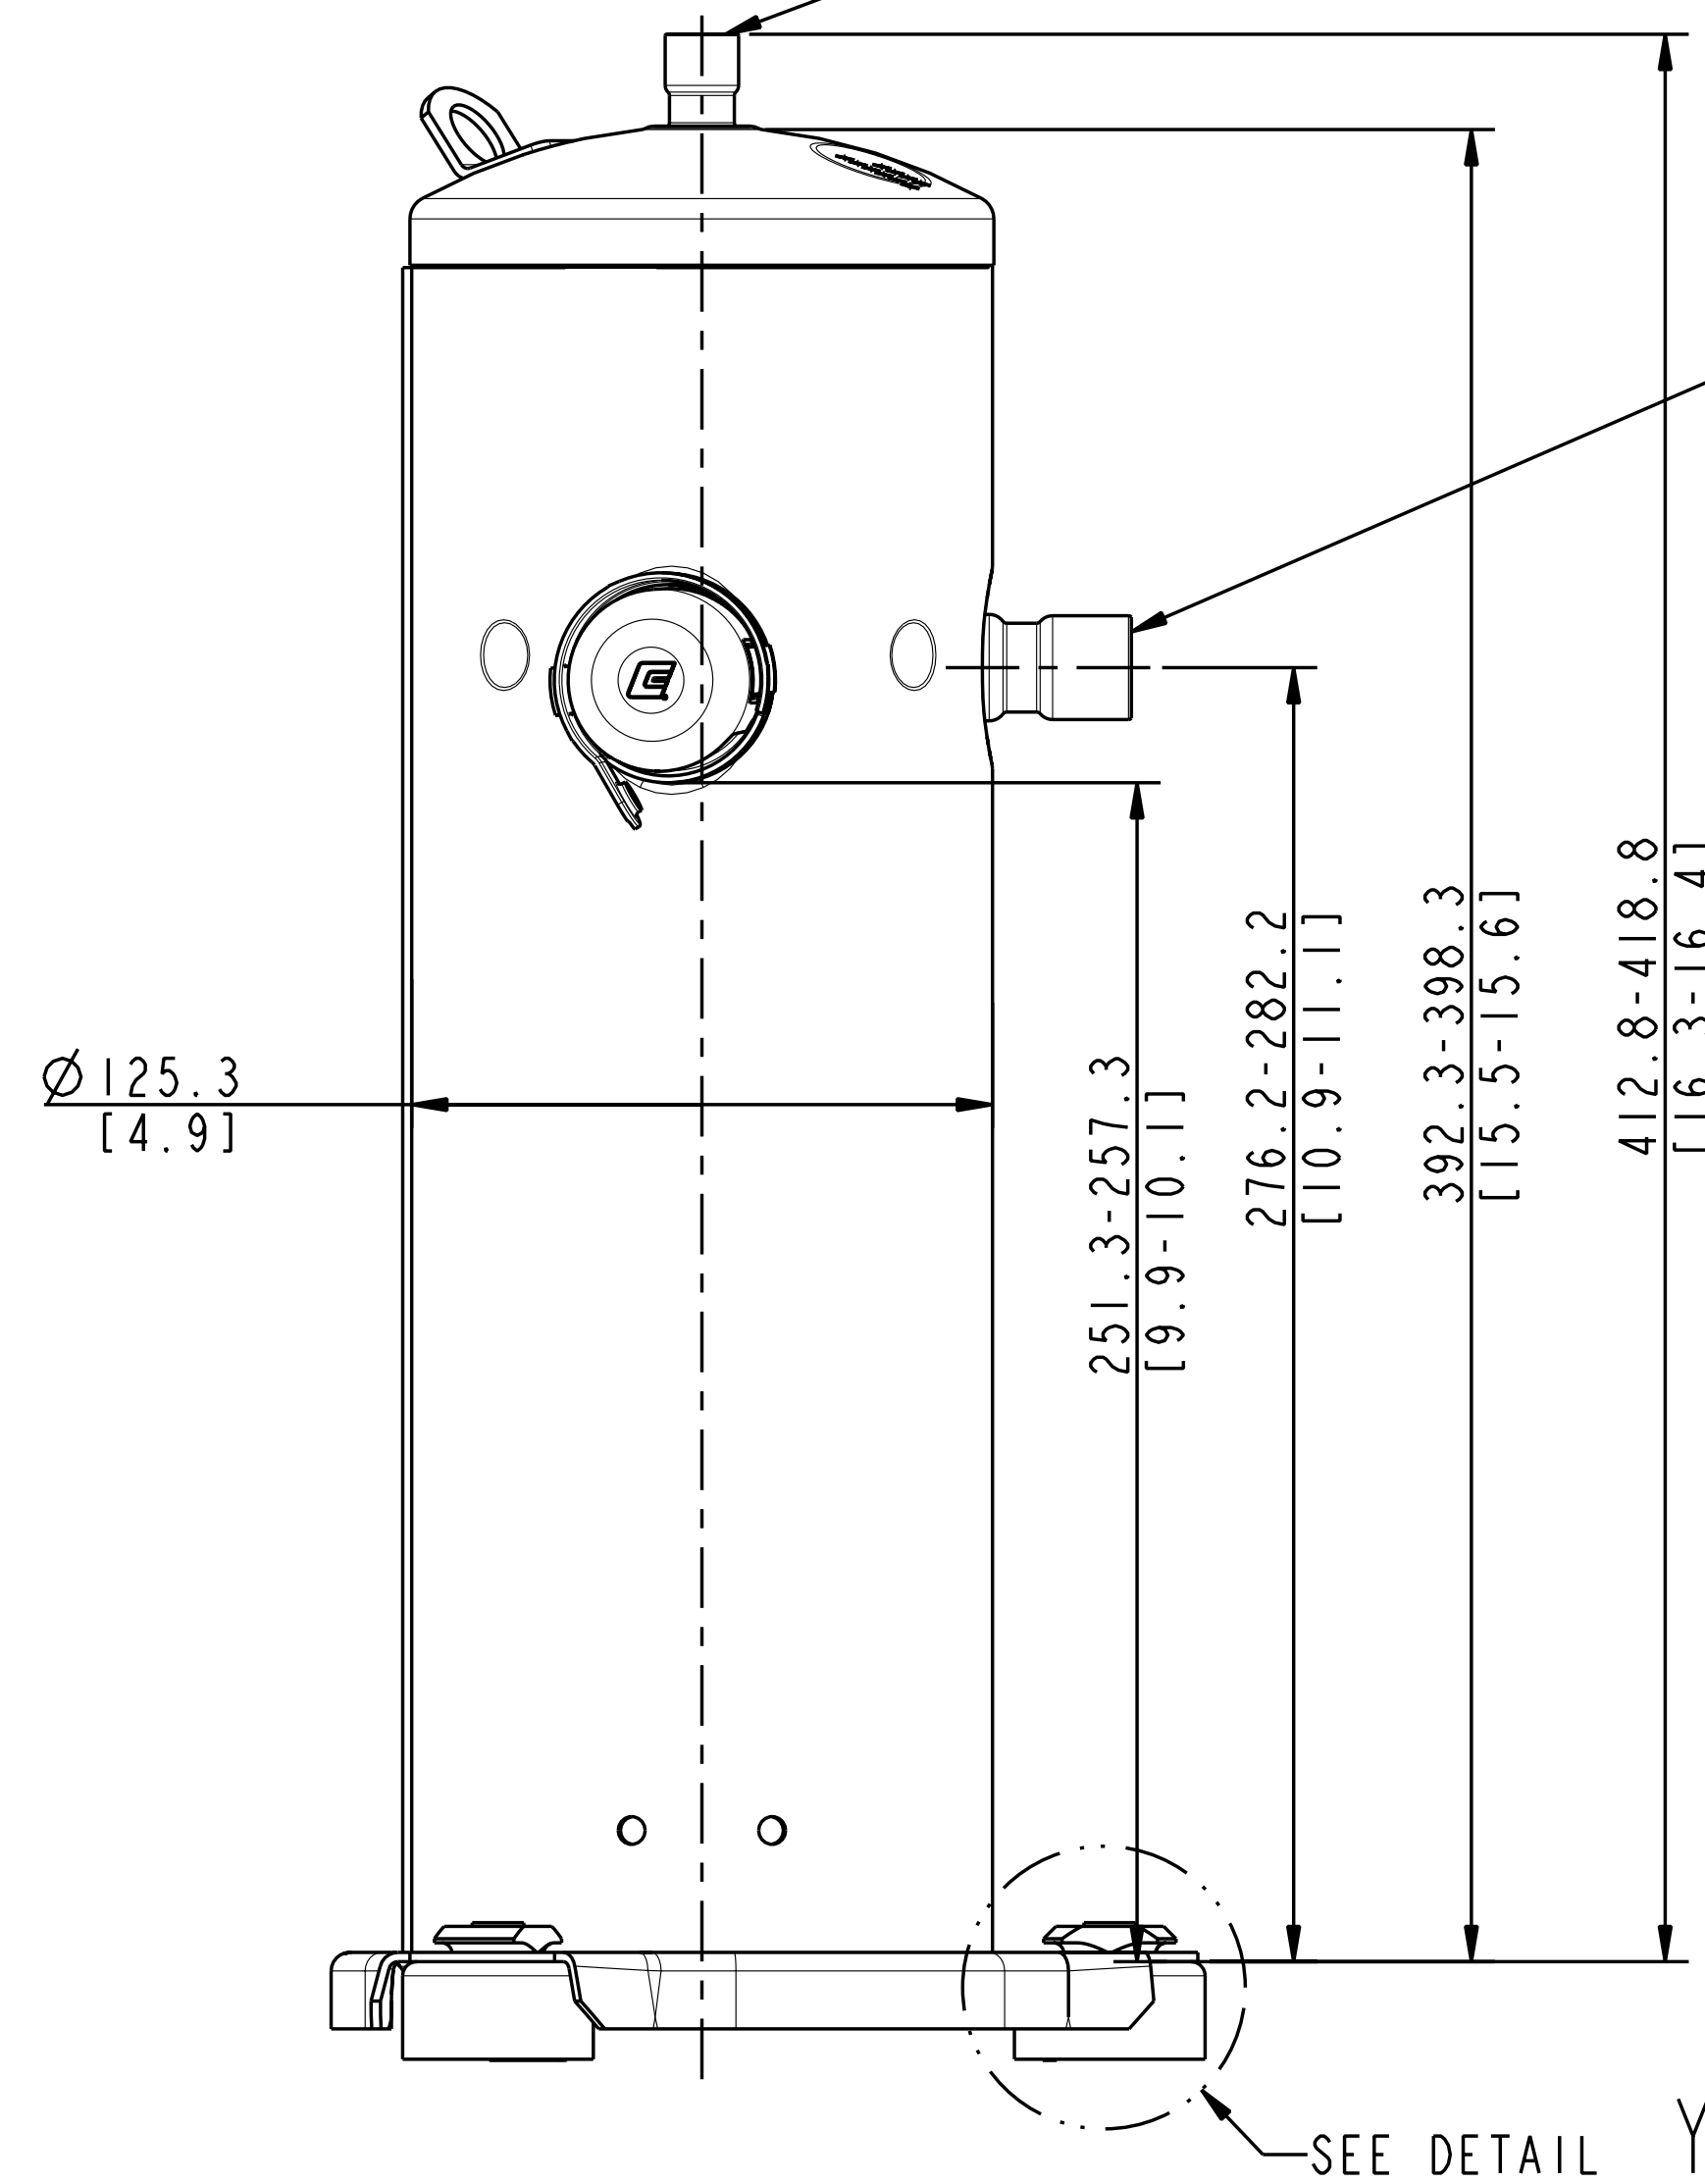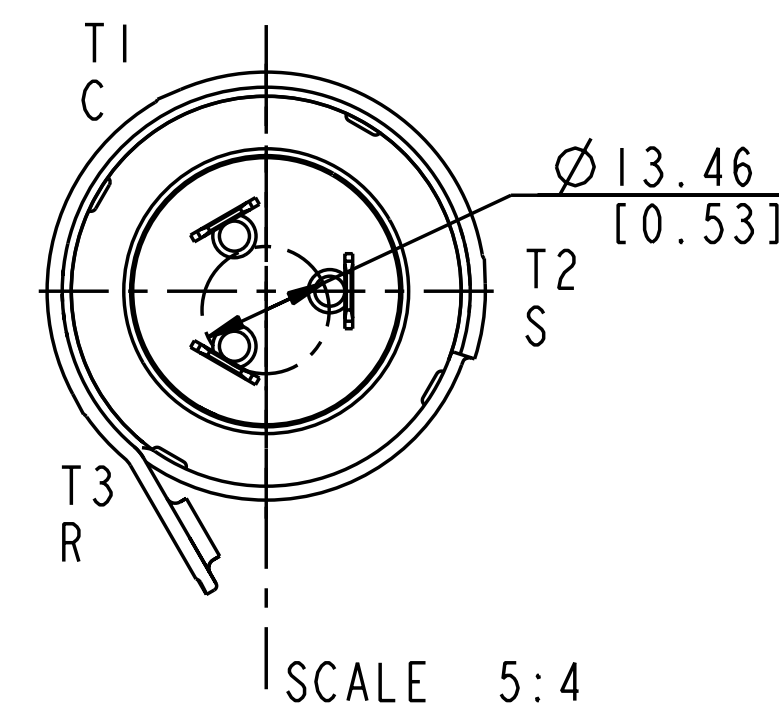

Ø 19.12-19.30 [0.753-0.760]
I.D. ∇ 16.0 [0.630] MIN. 0.038
[0.0015] MIN THICK EXTERIOR
AND 0.038[0.0015] MIN THICK
INTERIOR COPPER PLATED STEEL
SUCTION FITTING.

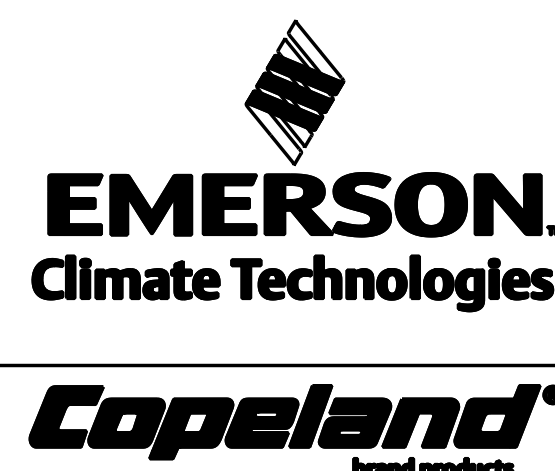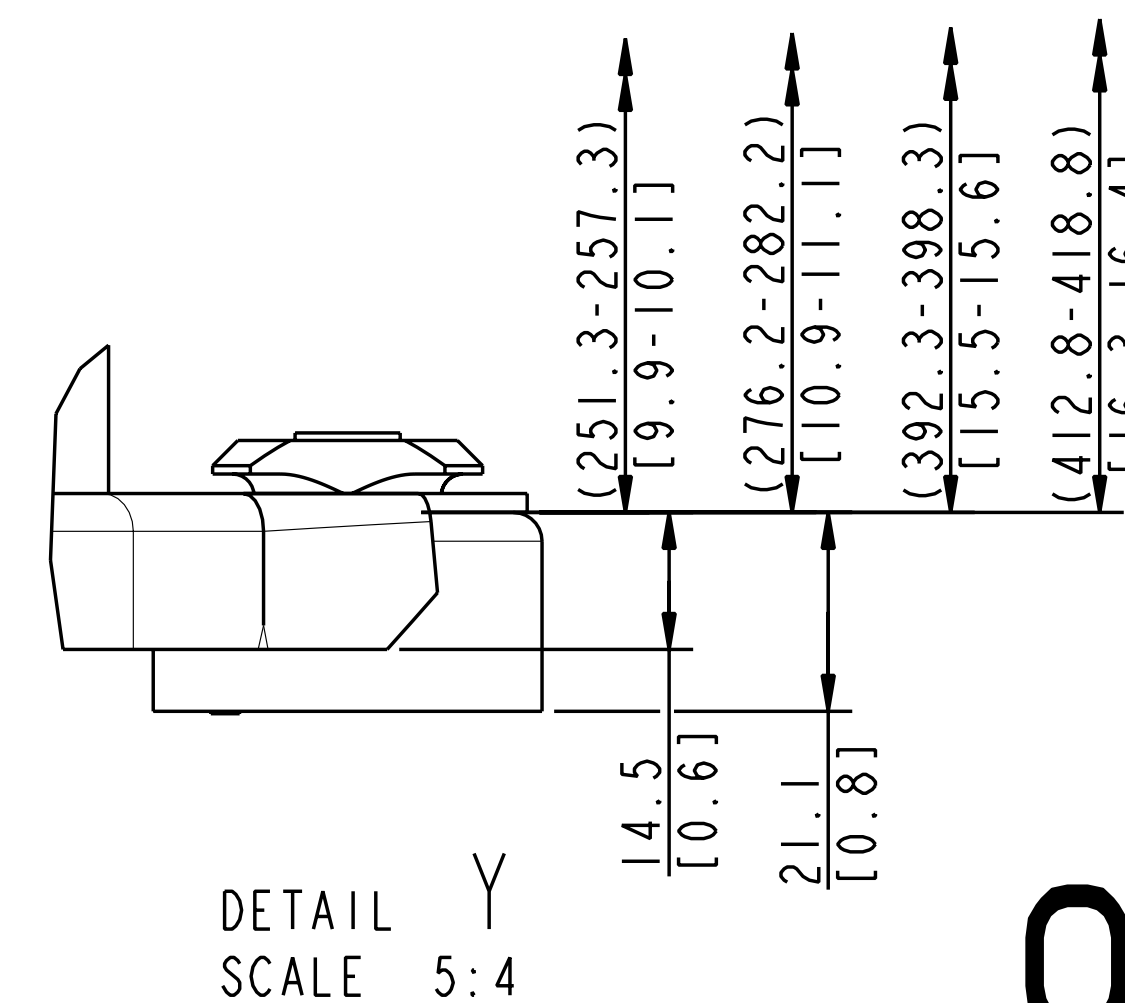

INTERPRET PER ASME Y14.5M-1994 AND EMERSON CLIMATE TECHNOLOGIES, INC. DESIGN STANDARDS DS2002	
DO NOT SCALE DRAWING	
	THIRD ANGLE PROJECTION 
CRITICAL PRODUCT CHARACTERISTIC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER OR (INCH) TOLERANCES: 1-PLACE ± 0.4 2-PLACE ± 0.15 ANGULAR $\pm 0.5^\circ$	

©COPYRIGHT EMERSON CLIMATE TECHNOLOGIES, INC. - CONFIDENTIAL