




Type: **AKFD 560-4 N.6HF A4**
Installation type 4 direction of airflow V with protection guard

Part no.:



Curve:

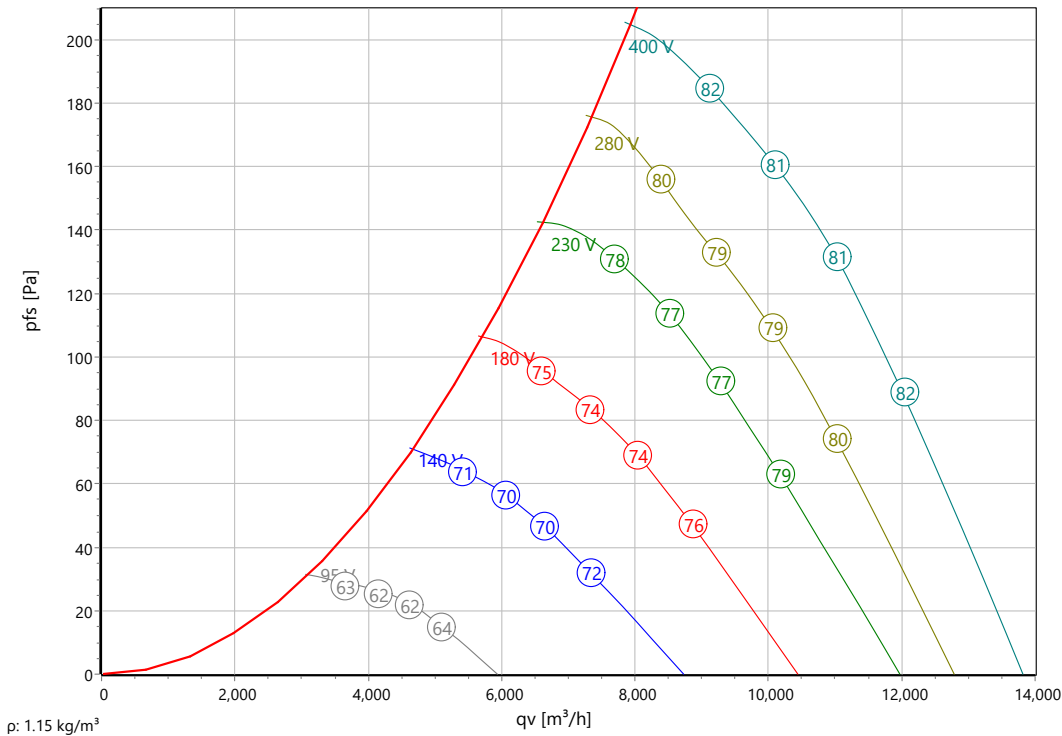

ErP-Data:

(EU) Nr. 327/2011 (Lot11)		
Q _v	9297	m³/h
P _{fs}	191	Pa
η _{fs}	34.8	%
P _e	1.41	kW
n	1389	r/min
N	40	N
v	10.498	m/s

Nominal Data:

U [V]	f [Hz]	C [μF]	P _e [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²s/h]	I _A / I _N	IP	m [kg]
400 D	50	-	1.43	2.79	1390	-25 .. +75	-	5.5	IP 54	25
400 Y			1.05	1.76	1180					

ΔI 15 %

Sound Data:

Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]	-	-22	-12	-8	-5	-6	-8	-13	LpA(A,in) [dB(A)]	-7	-17

t_R=65°C, Delta I=23% if using electronic controller



Type: **AKFD 560-4 N.6HF A4**
Installation type 4 direction of airflow V with protection guard
Part no.:

