




Type: **ERAE 250-6**

clockwise

Part no.: B10-25003

**Curve:**

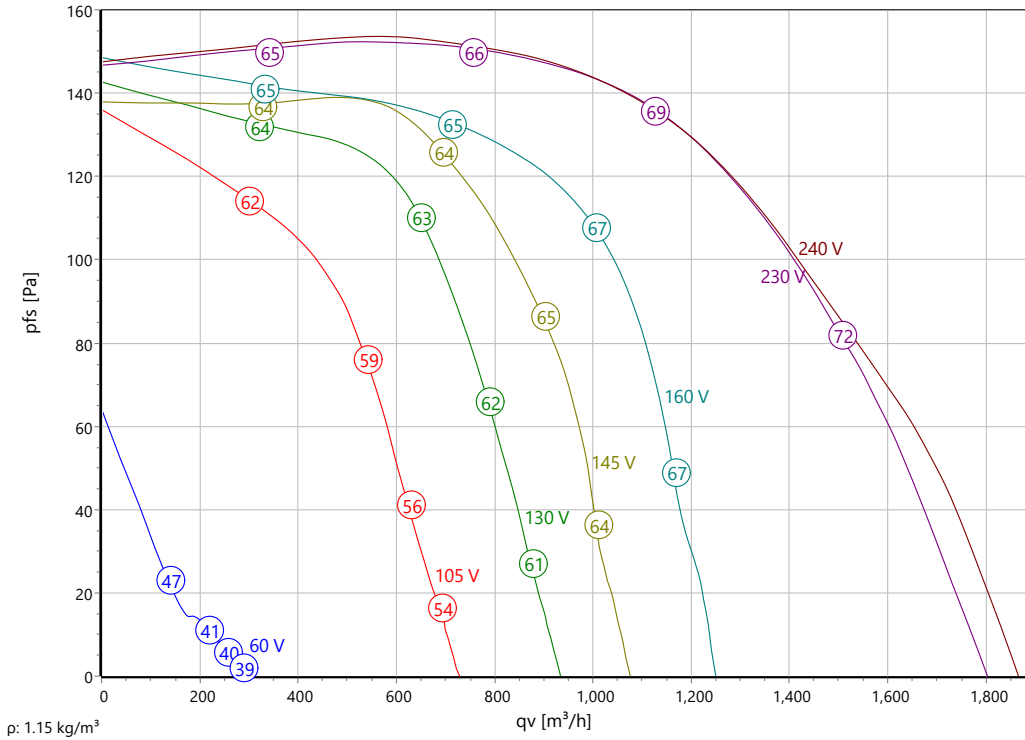

**Nominal Data:**

U [V]	f [Hz]	C [µF]	P <sub>e</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²s/h]	I <sub>A</sub> / I <sub>N</sub>	IP	m [kg]
230	50	6	0.3	1.3	760	-25 .. +60	-	1.4	IP 54	15

**Sound Data:**

Frequency	Σ		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(B,in) [dB(A)]	-3	-	-20	-18	-8	-5	-5	-8	-16	LpA(B,in) [dB(A)]	-10	-20
LwA(B,out) [dB(A)]		-	-23	-10	-6	-6	-6	-8	-15	LpA(B,out) [dB(A)]	-7	-17



Type: **ERAE 250-6**

clockwise

Part no.: B10-25003

